



PUSH BUTTON - TYPE RRFB

TECHNICAL DATA SHEET

HOUSING

Material	Polycarbonate
Colour	RAL 1007 yellow, (on request - blue RAL 5017)
Dimensions	180 mm/ 68 mm / 57 mm 
Weight	600 g - 900 g (depending on the length of the cable)
Operating altitude (MAMSL)	up to 2000 m
Temperatur Range (°C)	min. -40°C / max. +70°C
Protection Class	Class II
IP Classification	IP 55
IK Rating	IK 09
Compliance with standards	DIN 32981:2018-06 DIN EN 50556:2019-03 (VDE 0832-100) DIN EN 50293:2013-02 (VDE 0832-100) RiLSA 2015 DIN EN 62368-1:2016-05

DESCRIPTION RRFB Button

Voltage	12 V - 24V DC
Speech output	Loudspeaker
Request	mecnanical or sensor
Rated load-carraing capacity	2W
Blind request	max. 100mA




PUSH BUTTON - TYPE RRFB

ACCESSORIES (SEPARATELY ORDER)


Metal protection guard
(Stainless steel)

To protect the push button against vandalism.

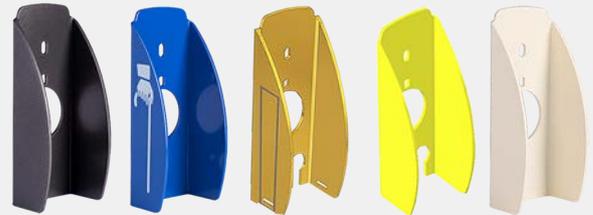

Rubber gasket flat
Item no. 12021

For attaching the push button on the flat surfaces (for example wall).



Adapter plate (Stainless steel)
Item no. 10010

For attaching the push button on the flat surfaces and line access from above or below.

